


NOTES

1. REFER TO APPLICABLE SYMBOL LIST.
2. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M - 1982.
3. LEAD DIMENSION UNCONTROLLED IN L₃.
4. TAB CONTOUR OPTIONAL WITHIN DIM. b₂ & L₂.
5. CONTROLLING DIMENSIONS: INCH.

SYMBOL	VARIATIONS (ALL DIMENSIONS SHOWN IN MILLIMETERS)												
	AA		NOTE	AB		NOTE	MIN.	MAX.	NOTE	MIN.	MAX.	NOTE	
	MIN.	MAX.		MIN.	MAX.								
A	2.19	2.38		2.19	2.38								
A ₁	0.89	1.14		1.02	1.27								
b	0.64	0.89		0.64	0.89								
b ₁	0.76	1.14		0.76	1.14								
b ₂	5.21	5.46	4	5.21	5.46	4							
c	0.46	0.58		0.46	0.58								
c ₁	0.46	0.58		0.46	0.58								
D	5.97	6.22		5.33	5.59								
E	6.35	6.73		6.35	6.73								
e	2.28 BSC.			2.28 BSC.									
L	8.89	9.65		15.62	16.38								
L ₁	1.91	2.28		3.18	3.68								
L ₂	0.89	1.27	4	1.52	2.03	4							
L ₃	1.15	1.52	3	1.15	1.52	3							
NOTE													
REF.	ITEM 10.210			ITEM 10.267									
ISSUE													
JEDEC SOLID STATE PRODUCT OUTLINES				TITLE: HEADER FAMILY INSERTION MOUNT (PERIPHERAL TERMINALS)				ISSUE C		DATE SEP-88		TO-251	

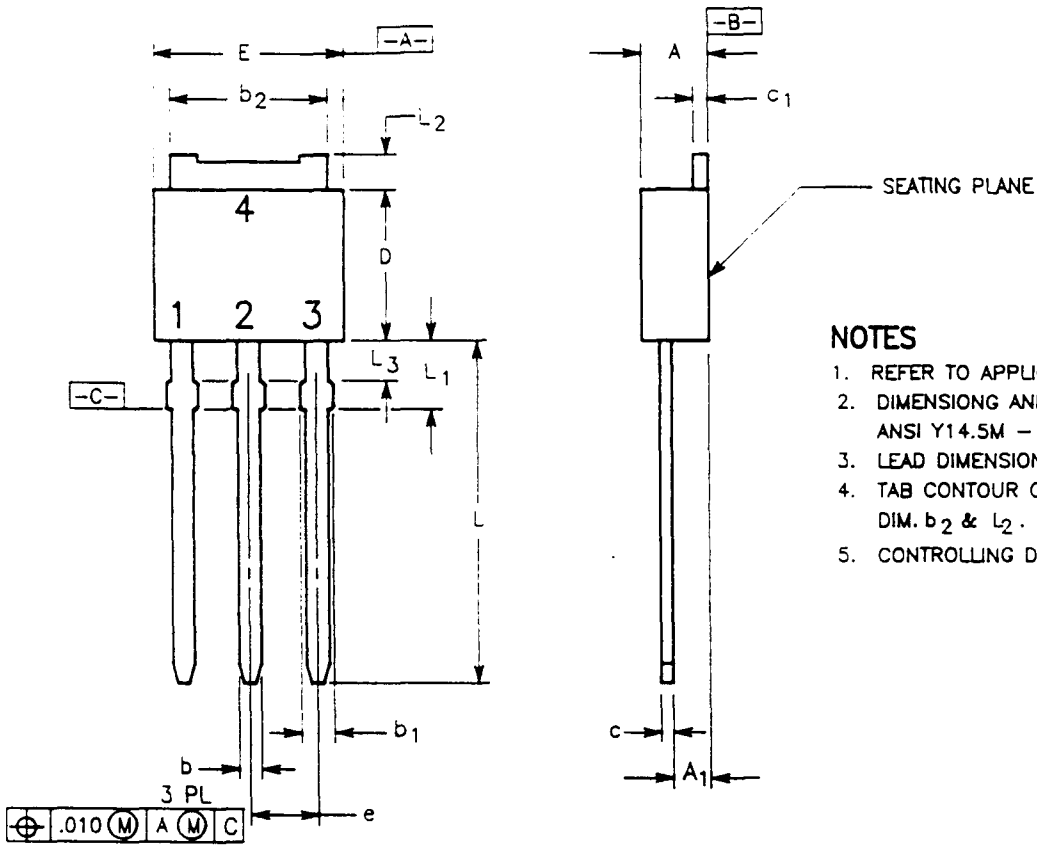

SYMBOL	VARIATIONS (ALL DIMENSIONS SHOWN IN INCHES)											
	AA		NOTE	AB		NOTE	MIN.	MAX.	NOTE	MIN.	MAX.	
	MIN.	MAX.		MIN.	MAX.							
A	.086	.094		.086	.094							
A ₁	.035	.045		.040	.050							
b	.025	.035		.025	.035							
b ₁	.030	.045		.030	.045							
b ₂	.205	.215	4	.205	.215	4						
c	.018	.023		.018	.023							
c ₁	.018	.023		.018	.023							
D	.235	.245		.210	.220							
E	.250	.265		.250	.265							
e	.090 BSC.			.090 BSC.								
L	.350	.380		.615	.645							
L ₁	.075	.090		.125	.145							
L ₂	.035	.050	4	.060	.080	4						
L ₃	.045	.060	3	.045	.060	3						
NOTE												
REF.	ITEM 10.210			ITEM 10.267								
ISSUE												
JEDEC SOLID STATE PRODUCT OUTLINES				TITLE: HEADER FAMILY INSERTION MOUNT (PERIPHERAL TERMINALS)				ISSUE C		DATE SEP-88		TO-251