



NOTES:

1. Refer to applicable symbol list.
2. Dimensioning and Tolerancing per ANSI Y14.5.M. 1982.
3. Controlling Dimension: INCH.
4. See M0-078 for same case in 5-lead version.

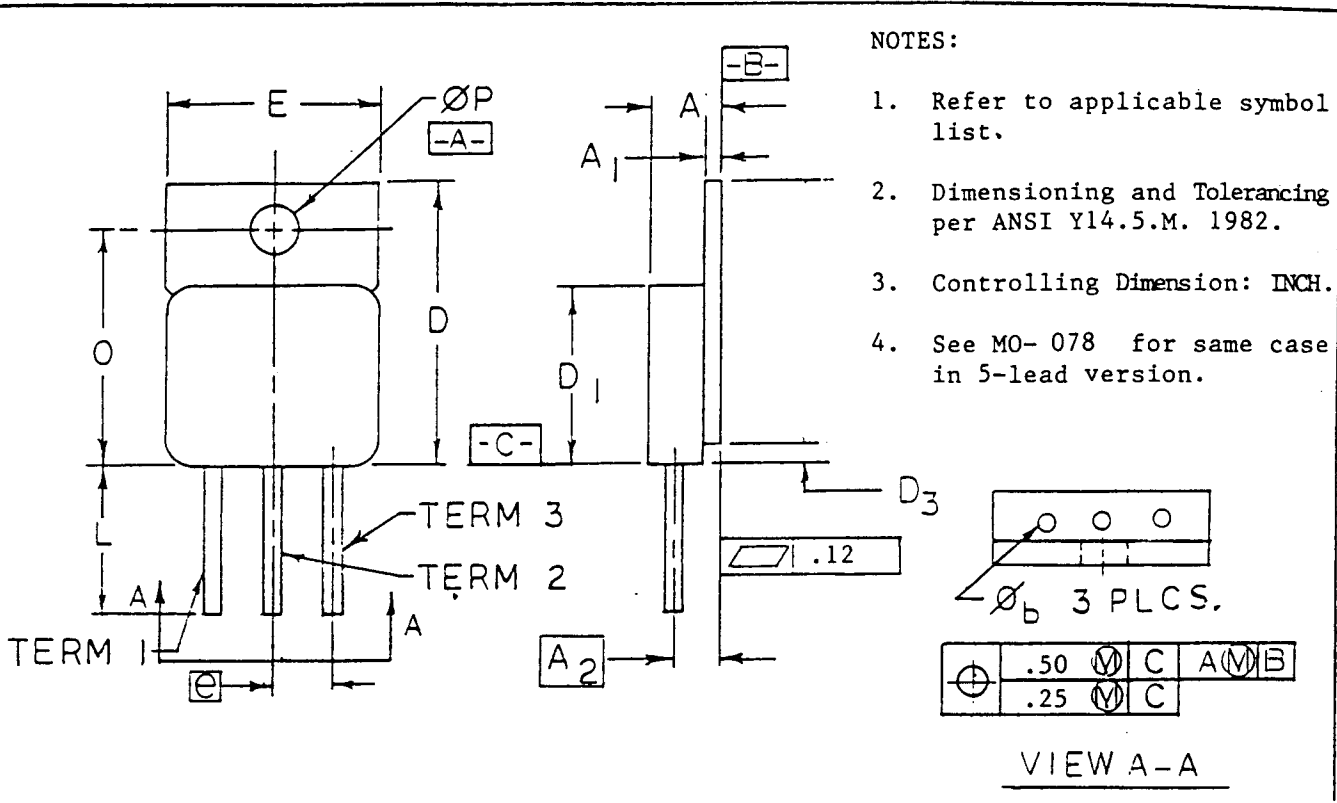

SYMBOL	VARIATIONS (ALL DIMENSIONS SHOWN IN MM)											
	AA		NOTE									
	MIN.	MAX.										
A	6.09	6.85										
A ₁	.88	1.14										
A ₂	3.55 BSC.											
Ø _b	1.39	1.65										
D	20.70	21.20										
D ₁	13.46	13.97										
D ₃	.00	2.33										
e	5.08 BSC.											
E	17.39	17.65										
L	12.70	19.05										
O	17.70	17.95										
ØP	3.93	4.19										
NOTE	1, 2, 3, 4											
REF..												
ISSUE												
			TITLE: HERMETIC FLANGE MOUNTED HEADER FAMILY (PERIPHERAL TERMINALS) THREE LEAD, 5.08 SPACING				ISSUE: A		DATE: 2-88		T0-258	

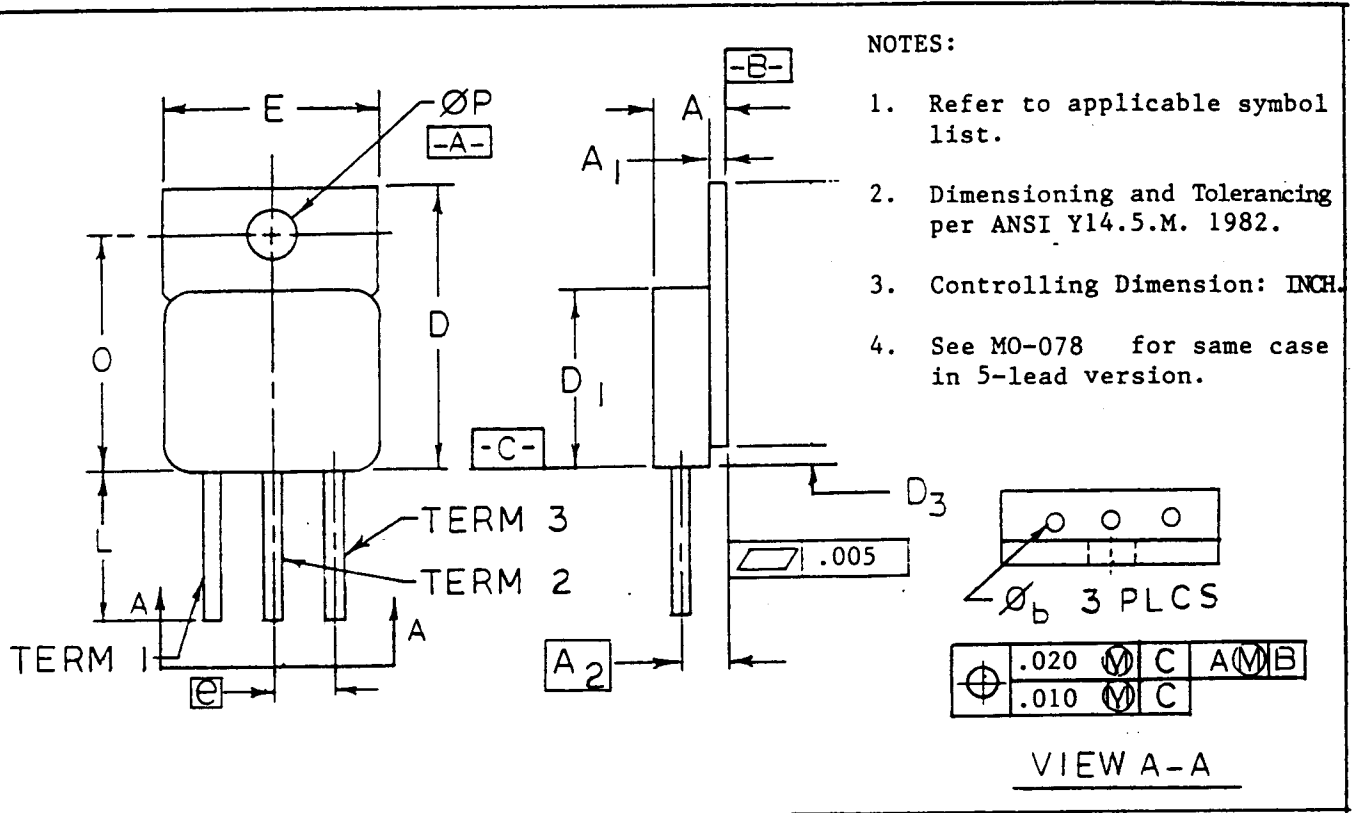

SYMBOL	VARIATIONS (ALL DIMENSIONS SHOWN IN INCHES)									
	AA		NOTE							
	MIN.	MAX.								
A	.240	.270								
A1	.035	.045								
A2	.140 BSC.									
ϕ_b	.055	.065								
D	.815	.835								
D1	.530	.550								
D3	.000	.092								
e	.200 BSC.									
E	.685	.695								
L	.500	.750								
O	.697	.707								
ϕ_P	.155	.165								
NOTE	1, 2, 3, 4									
REF.	ITEM 10-251									
ISSUE										
TITLE: HERMETIC FLANGE MOUNTED HEADER FAMILY (PERIPHERAL TERMINALS) THREE LEAD, .200 SPACING				ISSUE:	DATE:					
				A	2-88	T0-258				